

USB-DVI/VGA Adapter Quick Start Guide

Add multiple DVI displays to your PC.

1. Installing the Driver

CAUTION: DO NOT connect the adapter to your computer before installing the provided driver.

Insert the provided CD into your disc drive and the installer program will run automatically when the Driver CD is inserted. Then follow the on-screen prompts to complete the installation.

USB-DVI/VGA Adapter Quick Start Guide

For Windows Vista® users:

- Click on “Run Setup.exe” to execute the installer program.
- If you encounter a User Account Control dialog box when attempting to install a program, enter an administrator password or click “Allow” to start the installation.
- When prompted to restart your computer, click “Yes.”

NOTE: A reboot is always needed for a successful installation. If the reboot prompt doesn't appear, make sure to manually reboot your computer.

For Windows® 2000/XP users:

- If prompted for system patch after running the setup file, download and install the required patch first. After that, execute the setup file again to install the driver.

2. Making the Connection


Connect the smaller end of the USB cable to the adapter. Then connect the other end of the USB cable to a USB 2.0 port on your computer. If your monitor is not yet connected to the adapter, make the connection and power on your monitor. After the connection, Windows will automatically complete the installation. On Windows Vista, if the add-on monitor is blank, reboot your system again.

NOTE: Before the installation is complete, it's normal that the screen flickers black a couple of times.

3. Changing the Display Mode

There are several ways you can use the monitor attached on the adapter. The add-on monitor can be configured to use either “mirror mode” or “extended mode” (extend your Windows desktop to the add-on monitor).

Click on the “DisplayLink Device” icon to control the display adapter and select to configure Display Properties as shown in Figure 1.

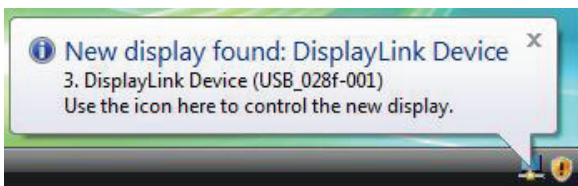

(The above string depends on each display adapter.)

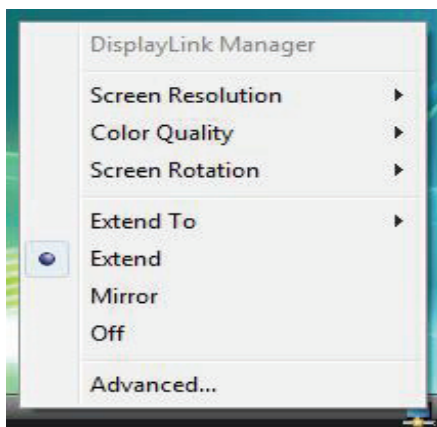


Figure 1. Change the display mode.

This Quick Installation Guide describes only the basic installation instructions. For more information, please refer to the User’s Manual on the provided CD-ROM.

4. Specifications

Color — 16- and 32-bit

Modes — Mirrored desktop, extended desktop, primary display

Operating Systems — Windows 2000, XP, 7; Windows Vista

Resolution — All resolutions up to 1920 x 1080

Video Modes — All VESA modes to 1080p excluding interlaced and reduced blanking

CE Approval — Yes

RoHS — Yes

Connectors — (1) USB Mini B F, (1) DVI-I F, (1) DVI M to VGA HD15 F adapter

Power — Interface-powered from USB Type A port (5 V, 500 mA)

Size — 0.7"H x 2.2"W x 3.4"D (1.8 x 5.4 x 8.5 cm)



© Copyright 2011. Black Box Corporation. All rights reserved. Black Box® and the Double Diamond logo are registered trademarks of BB Technologies, Inc. Windows® and Windows Vista® are registered trademarks of Microsoft Corporation. Any third-party trademarks appearing in this guide are acknowledged to be the property of their respective owners.

AC1039A-R3 Quick Start Guide, version 1

**FREE, live, 24/7 Tech Support is just 30 seconds away.
724-746-5500 | blackbox.com**