


REVISIONS				
LTR	DESTRPTION	DATE	DWN	APVD


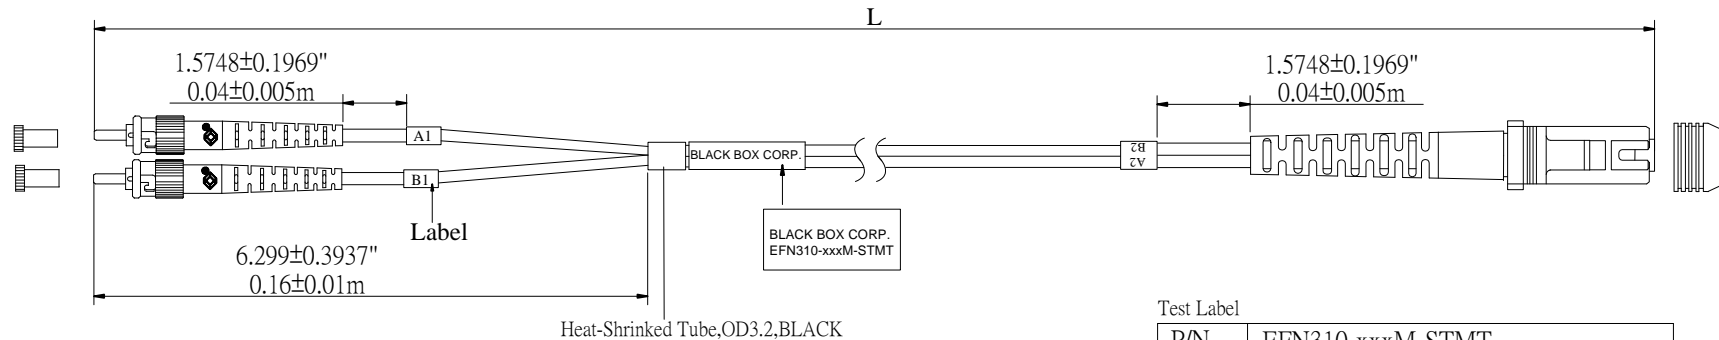


Test Label

P/N	EFN310-xxxM-STMT		
S/N	Client Numbers(P/O)-Serial Number -N		
ST/MTRJ;9/125;[Length]M			
DUPLX FIBER OPTIC CABLE			
INSERTION LOSS/RETURN	LOSS	LOSS	LOSS
A1	/ dB	B1	/ dB
A2	/ dB	B2	/ dB

ST CONNECTOR SET

MTRJ CONNECTOR SET



N0	PART NAME
1	DUST CAP
2	MM 127 μ m FERRULE
3	FLANGE
4	SPRING
5	COUPLING NUT
6	WASHER
7	CRIMP(3.0mm)
8	BOOT(Black,3.0mm)

N0	PART NAME
1	DUST COVER(BLACK)
2	HOUSING(BLACK)
3	SM FERRULE
4	PIN KEEPER
5	SPRING
6	SPRING PUSH
7	CRIMP EYELET
8	STRAIN RELIEF BOOT(BLACK)

Specification

1. Marking: BLACK BOX CORPORATION GUARANTEED FOR LIFE (724) 746-5500 - - - SINGLEMODE FIBER CABLE - - ZIPCORD SMF-9/125 OFNR-(UL) E223839 xx/xxxx xxxM
2. Fiber: Singlemode Optical Fiber
3. Fiber cord: 1.8\*3.7mm PVC-OFNR ,Color Yellow
4. Operating wavelength: 1310nm
4. Insertion Loss: ST(End): ≤ 0.2dB; MTRJ(End): ≤ 0.5dB
5. Return Loss: ST(End): ≥ 55dB; MTRJ(End): ≥ 35dB

DWN	Nkx	9Sep2008	NAME 1.8*3.7mm Yellow PVC ST-MTRJ 9/125 Patchcord		
CHK		9Sep2008			
APVD		9Sep2008	DRAWING NO. EFN310-xxxM-STMT		
UNIT: mm			SCALE	SHEET OF	REV
BLACK BOX			NTS	1 1	0