



MATERIAL
 Overall Shield: Copper C2680, t=0.009 in (0.25 mm), plated with 30 µin (0.67 µm) nickel
 Bracket: SUS304
 Housing: High-impact Acrylonitrile Butadiene Styrene (ABS resin), UL 94 V-0 rated
 Jack Contacts: 5100W spring temper phosphor bronze round wire, Ø=0.018 in (0.45 mm), plated with 50 µin (1.27 µm) minimum thick hard gold over 100 µin (2.54 µm) minimum thick nickel underplate
 PCB: FR4, UL 94 V-0 rated
 RoHS compliant

PERFORMANCE
 MHz Support: 1-250 MHz
 Compliant: Support TIA-568-C.2 Cat.6 Channel environment
 Bandwidth Support: 10/100/1000 Mbps

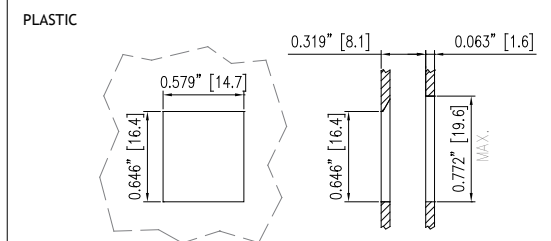

SUGGESTED CUTOUT: FLUSH-MOUNT APPLICATION

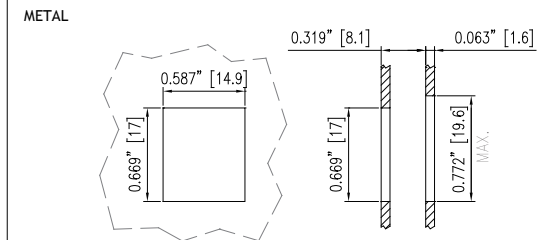

DRAWN BY Autumn Lee				
APPROVED BY Jerry Su				
DIMENSIONS ARE [IN (MM)]				
TOLERANCES:				
~0.8"	~2"	~6"	6"~	ANGLE
±0.007"	±0.015"	±0.02"	±0.06"	2°
3rd Angle Projection				

Another quality product from
BLACK BOX
724-748-9300 • www.blackbox.com

TITLE CAT6 Keystone Straight Coupler Shielded, Sliver		REVISION 1
PARTS NO. FM693, FM693-10PAK	SCALE X	SHEET 1/1
DATE 2010/04/19		