


FILE NO.	FOT118,FOT120
PART NO.	-

REVISIONS		DATE	ECO No.	APPVD
REV. A	RELEASE TO PRODUCT	2010/11/05		CHANG

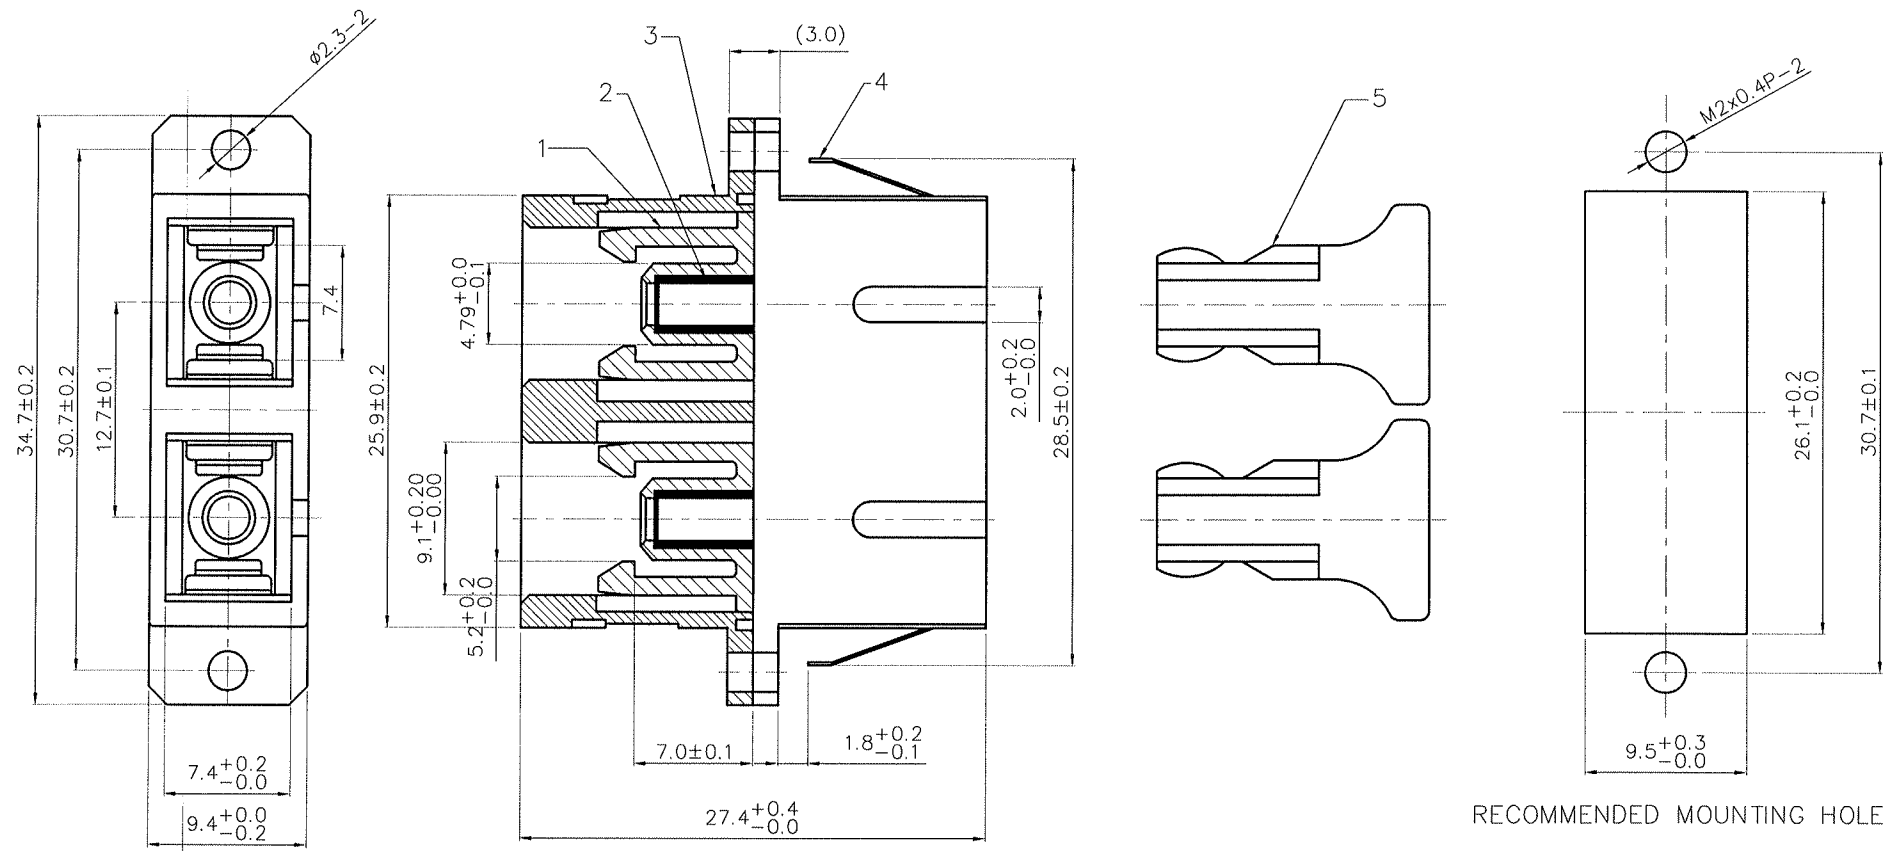

- NOTES:
1. INSERTION LOSS : 0.20dB/0.30dB (TYP./MAX.)
  2. RETENTION FORCE: 200GF(1.96N)~600GF(5.88N)
  3. DURABILITY (500 MATINGS) : 0.15dB MAX. INCREASE.
  4. OPERATING TEMPERATURE : -40°C~+80°C.
  5. ALL MATERIAL COMPLIANT WITH RoHS.
  6. BLACK BOX :  
S.M. PhBr : FOT118  
S.M. ZrO2 : FOT120

NO.	PART NAME	Q'TY	MATERIAL	PROCESSING
5	CAP	4	PBT UL 94V-0	---
4	PLATE	1	SUS301	STAINLESS STEEL
3	ADAPTOR HOUSING	2	PBT UL 94V-0	---
2	SLEEVE	2	ZrO2 / PhBr	---
1	HOOK	4	PBT UL 94V-0	---

MATERIAL		SIGNATURE	DATE	Another quality product from <b>BLACK BOX</b> <small>SHANGHAI WANGSHI ELECTRONIC CO., LTD.</small> <small>732-318-8188 • www.blackbox.com</small>
QUANTITY		DRAWN	LU 2010/11/05	
		PROJECT ENGINEER	LU 2010/11/05	
		CHECKED	LIU 2010/11/05	
		APPROVED	CHANG 2010/11/05	
		DRAWING MANAGER	CHANG 2010/11/05	

DWG. NAME		SCALE: 1:1		REV.
DUPLEX SC ADAPTOR		C		A
SHEET 1 OF 1		2010/11/05		