

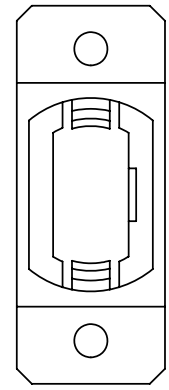
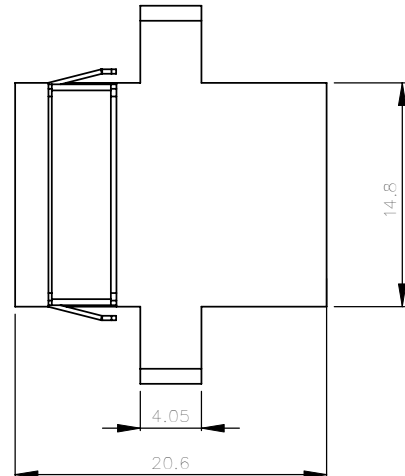


FILE NO.	FOT129
PART NO.	-

REVISIONS				
REV.	DESCRIPTION	DATE	ECO No.	APP'VD
A	RELEASE TO PRODUCT	2010/11/05		CHANG

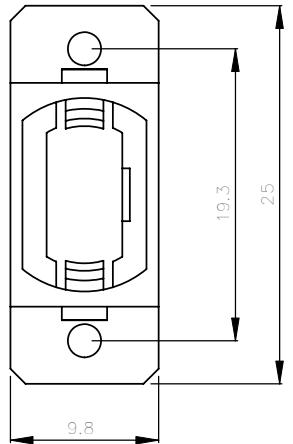

- NOTES:
- 1.INSERTION LOSS: 0.20dB/0.30dB (TYP./MAX.)
 - 2.RETENTION FORCE IS 200GF(1.96N)~600GF(5.88N).
 - 3.DURABILITY (500 MATINGS) 0.15dB MAX INCREASE.
 - 4.OPERATING TEMPERATURE -40° ~+80° C.
 - 5.HUMIDITY 95% R.H.(NON-CONDENSING).
 - 6.ALL MATERIAL COMPLIANT WITH RoHS.
 - 7.BLACK BOX P/N : FOT129

MATERIAL	PEI		SIGNATURE	DATE	Another quality product from BLACK BOX <small>NET 745 9520 • www.blackbox.com</small>
QUANTITY		DRAWN	LU	2010/11/05	
		PROJECT ENGINEER	LU	2010/11/05	DWG. NAME
		CHECKED	LIU	2010/11/05	MTP (MPO) ADAPTER
		APPROVED	CHANG	2010/11/05	SIZE
		DRAWING MANAGER	CHUNG	2010/11/05	DWG. NO.
				SCALE : N/A	FOT129
				2010/11/05	REV. A
				SHEET 1 OF 1	