


MATERIAL OF LIST:

- 1.CABLE: UL20279 28AWG*1PR+26AWG*2C+AS
65% OD:0.177" COLOR:BLACK
- 2.CONNECTOR:USB A TYPE MALE SOLDCR TYPE CONDUCTOR
G/F INSULATION WHITE NICKEL PLATED SHELL
- 3.CONNECTOR:USB B TYPE MALE SOLDCR TYPE CONDUCTOR
G/F INSULATION WHITE NICKEL PLATED SHELL
- 4.PVC: COLOR BLACK
- 5.LABEL: WHITE GROUND WITH BLACK TEXT.
- 6.LABEL: YEAR MONTH LABEL

TEST ITEMS & TEST SPEC:

- 1.OPEN/SHORT/INTERMITTENCE 100%TEST
- 2.HI-POT:300V AC/sec
- 3.INSULATION RESISTANCE:20M ohm(MIN)
- 4.CONDUCTIVE RESISTANCE:2 ohm (MAX).

BBOX P/N:	L1 NOT STRETCHED	L2	L3	L1 STRETCHED
USB10-0001	1FT \pm 0.25FT	6.72" \pm 0.4"	2.76" \pm 1.58"	4.46FT
USB10-0002	2FT \pm 0.25FT	17.77" \pm 0.4"	3.12" \pm 1.58"	7.52FT
USB10-0003	3FT \pm 0.25FT	22.46" \pm 0.4"	6.72" \pm 1.58"	12.12FT

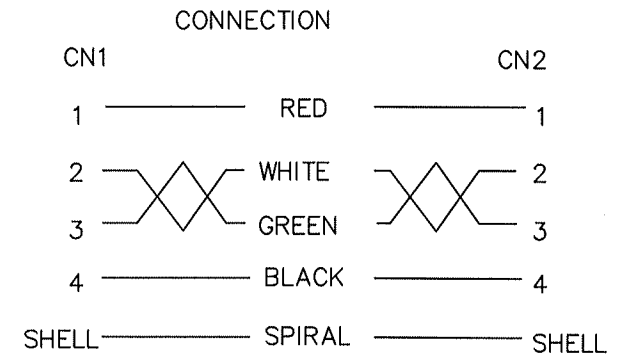

BLACK BOX		
Tolerance:	Approved by:	
X. \pm		
.X \pm	Checked by:	BLACK BOX P/N: USB10-****
.XX \pm		
.XXX \pm	Drawn by: xiong	Description: USB 2.0 COIL CABLE
Angle:	Date: 11.10.22	DWG. NO: FTD09-00580039
X' \pm	Scale:	Unit: mm
.X' \pm		SHEET: 1 OF 4
		REV: 02

REV	ECH NO	DESCRIPTION	APPD.	DATE