FILE NO.	FOT101,FOT103
PART NO.	-

REVISIONS				
REV.	DESCRIPTION	DATE	ECO No.	APP'D
A	RELEASE TO PRODUCT	2010/11/05		CHANG

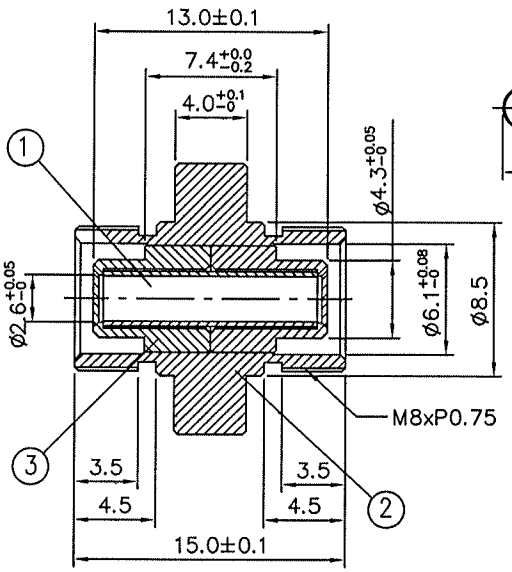



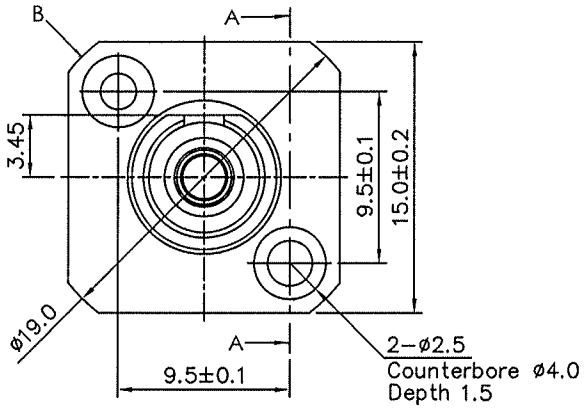

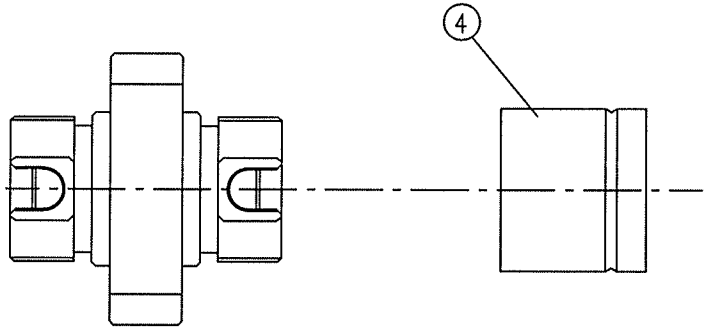

NOTES:
1. INSERTION LOSS : 0.20dB/0.30dB (TYP./MAX.)
2. RETENTION FORCE IS 200GF(1.96N)~600GF(5.88N).
3. DURABILITY (500 MATINGS) 0.15dB MAX INCREASE.
4. OPERATING TEMPERATURE −40°~+80°C.
5. HUMIDITY 95% R.H.(NON−CONDENSING).
6. ALL MATERIAL COMPLIANT WITH RoHS.
7. BLACK BOX P/N :
   S.M. PhBr : FOT101
   S.M. ZrO2 : FOT103



SECTION A-A

N0.	Part name	Q'TY	Material	Processing
4	Dust cap	2	PVC	N/A
3	Bush	1	Brass	Ni plating
2	Housing	1	Brass	Ni plating
1	Split sleeve	1	ZrO2 / PhBr	N/A

MATERIAL		SIGNATURE	DATE	Another quality product from BLACK BOX
QUANTITY	DRAWN	LU	2010/11/05	
	PROJECT ENGINEER	LU	2010/11/05	DWG. NAME: FC SQUARE ADAPTOR
	CHECKED	LIU	2010/11/05	
	APPROVED	CHANG	2010/11/05	SIZE C / DWG. NO. FOT101,FOT103 / REV. A
	DRAWING MANAGER	CHUNG	2010/11/05	SCALE : 2: / DATE : 2010/11/05 / SHEET 1 OF 1