


REVISIONS		
Rev	DESCRIPTION	DATE
A	INITIAL RELEASE	17/07/2018

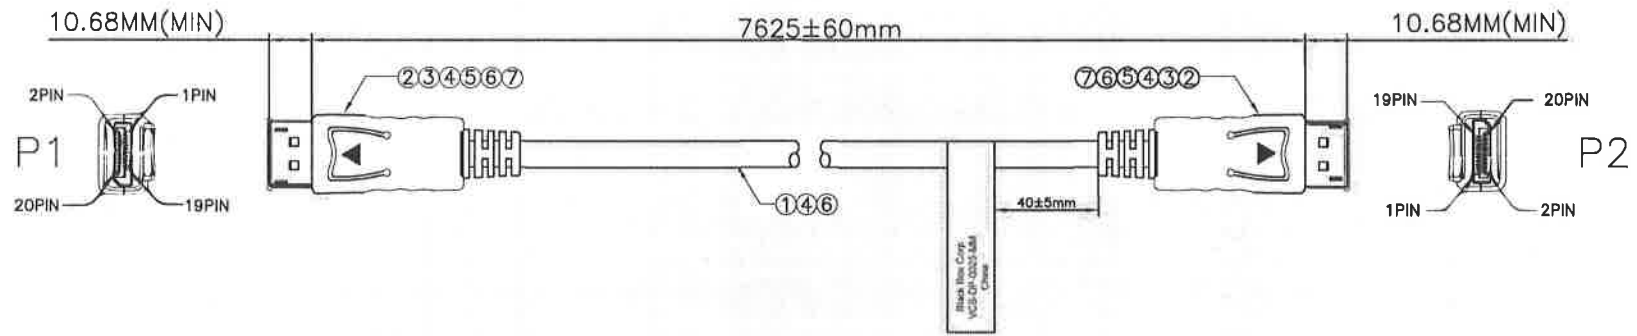


ELECTRICAL TEST :

- 1.100% OPEN & SHORT & MIS WIRE TEST
- 2.CONTACT RESISTANCE: 3 OHM(MAX)
- 3.INSULATION RESISTANCE:10M OHM(MIN)
- 4.HI-POT TEST:DC 300V/10ms

Black Box Corp VCB-DP-0025-MM China	Black Box Corp VCB-DP-0025-MM China
---	---

Cable Label Size:80x10mm

PIN Assignment

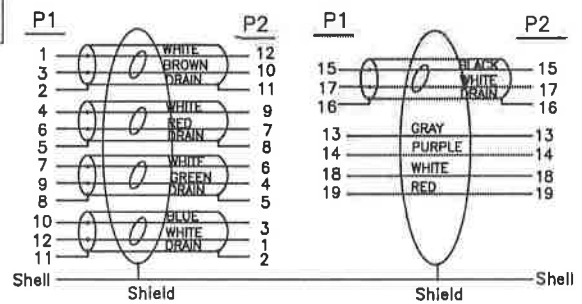

PRODUCT SPECIFICATIONS :

- 1.Connector Type: DisplayPort Port MALE TO MALE
- 2.Connector Plating and Material:
DisplayPort Port M Black Insulation ,Gold Plated 3u Terminal ,Gold Plated Shell.
- 3.Color: Black connectors and Black ABS Shell
- 4.RoHS 2.0: Yes
- 5.Resolution Supported: 4K*2K 60Hz
- 6.Cable Specifications:
Display Port UL20276~(28AWG*1P+EAM)*5C+28AWG*4C+AEB 50%AL~OD:7.3MM~Black~Marking:DisplayPort Cable E342987 AWM STYLE 20276 80 30V VW-1
- 7.Passive Adapter Supports TMDS

The information contained in this document is the sole property of Black Box Corporation of Pennsylvania. Any reproduction in part or whole without the written permission of Black Box Corp. is prohibited.
Copyright 2018 Black Box Corporation of Pennsylvania d/b/a Black Box Network Services. All Rights Reserved.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES (REFERENCED DIMENSIONS IN MILLIMETERS) FRACTIONS: 1/16" = 0.0625" DECIMAL: TWO PLACE DECIMAL THREE PLACE DECIMAL				TITLE:	
DRAWN: AX/ing				DATE: 07/17/2018	
ENG APPR:		CHECKED:		SIZE DWG. NCL	
MATERIAL: CRS		COMMENTS:		B VCB-DP2-0025-MM	
FINISH: POWDER COAT		DO NOT SCALE DRAWING		SCALE: 1:1	
				REV: A	
				SHEET 1 OF 2	